

SLIDE POTENTIOMETER

Slim Type




◆ FEATURE

- Insert molding of a resistor prevents flux build-up
- Enhanced an operational feel, snap characteristics and autonomy

◆ APPLICATIONS

- Graphic equalizers in mini components, radio cassette units and various other controls.

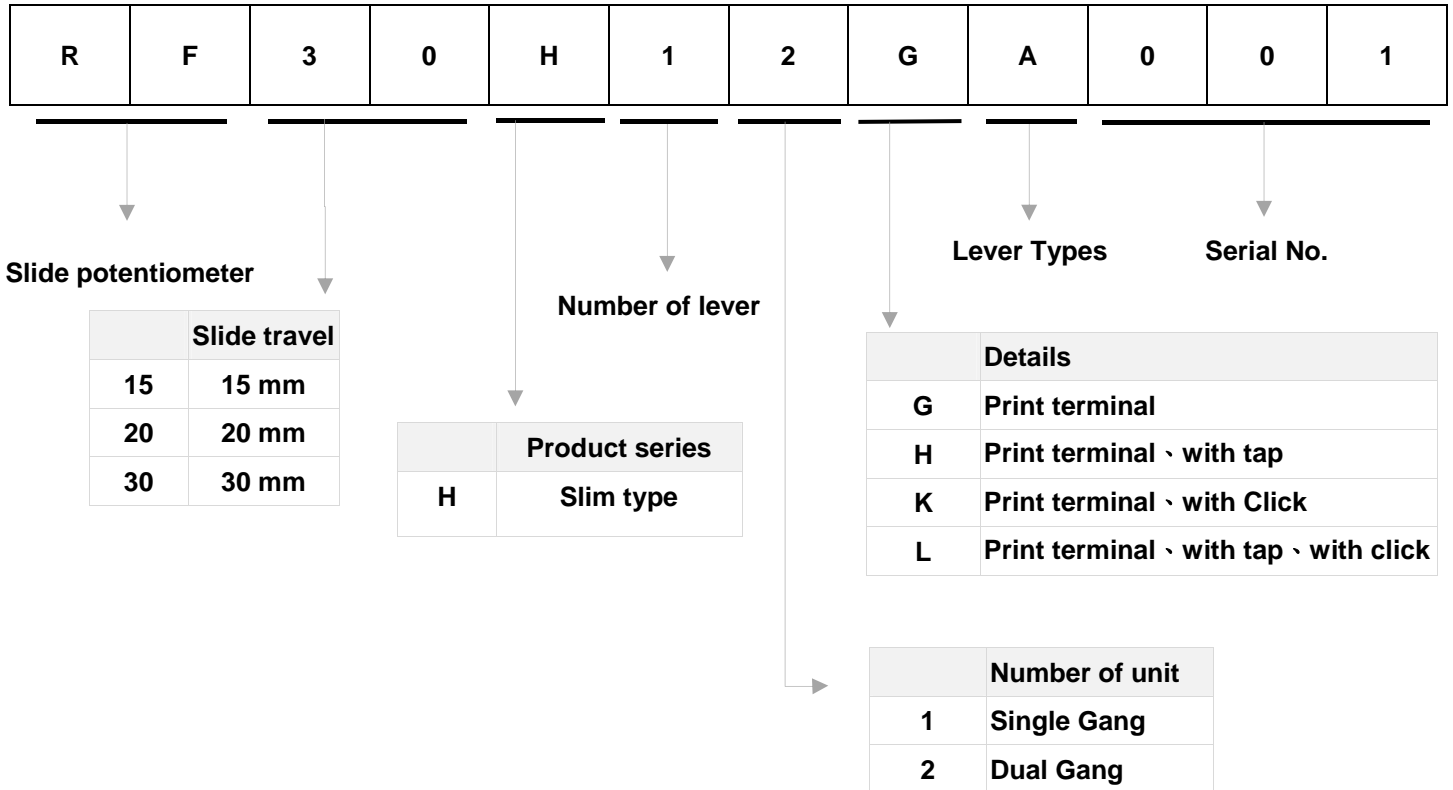

◆ COMMON SPECIFICATION

Characteristics	Specification
Operating temperature range	-10°C to +70°C
Operating force	20 ~ 110 gf
Total resistance (KΩ)	5 ∙ 10 ∙ 20 ∙ 50 ∙ 100 ∙ 250 ∙ 500
Total resistance tolerance	±20%
Resistance taper	A,B,C
Sliding service life	10,000 cycles

SLIDE POTENTIOMETER

Super With LED Type

LEVER TYPES

Unit : mm

Material	Insulated lever					
Lever type	A		C		D	
Dimensions						
Length (L)	4.5	9.5	9.5	14.5	9.5	14.5

Note: The color of the D type lever is black. Red, orange and white are selectable for markers.

DIMENSIONS

Unit : mm

Model	Dimensions					
RF□□H (Vertical type)						

P.C.B Mounting hole detail

Model	S	A (S+15)	B (S+12.5)	C (S+7.5)	D (S+2.5)
RF15H	15	30	27.5	22.5	17.5
RF20H	20	35	32.5	27.5	22.5
RF30H	30	45	42.5	37.5	32.5

Model	Dimensions					
RF□□H---7 (Horizontal type)						

P.C.B Mounting hole detail

Model	S	A (S+15)	B (S+15)	C (S+10)
RF15H	15	30	30	25
RF20H	20	35	35	30
RF30H	30	45	45	40